
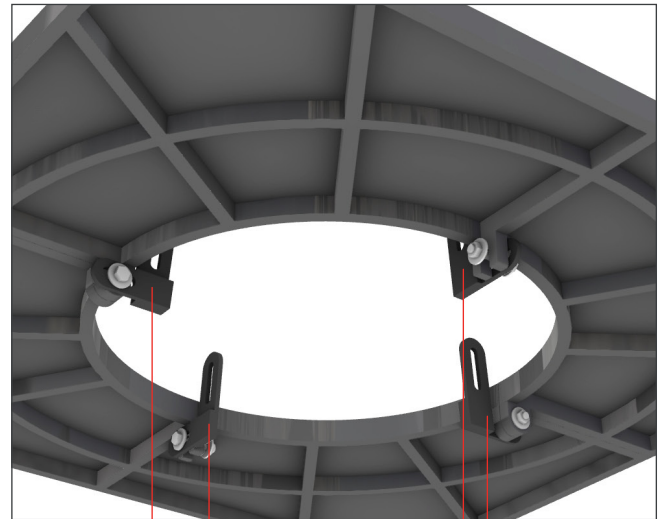


MALUS
VESE Tree guard
Mounting instructions

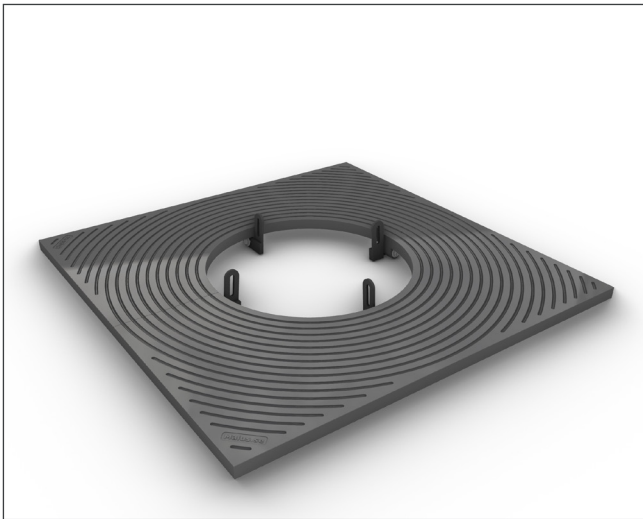


01.

Place 4 connectors as shown in the images. Use 4xM12 Nuts and bolts to connect the 2 halves of the metal grating and the tree guard connectors


Note! Fasten the nuts and bolts almost all the way, but allow for some final tightening after mounting the tree guard.

4 connectors
same M12 bolts that connect the
grating pieces

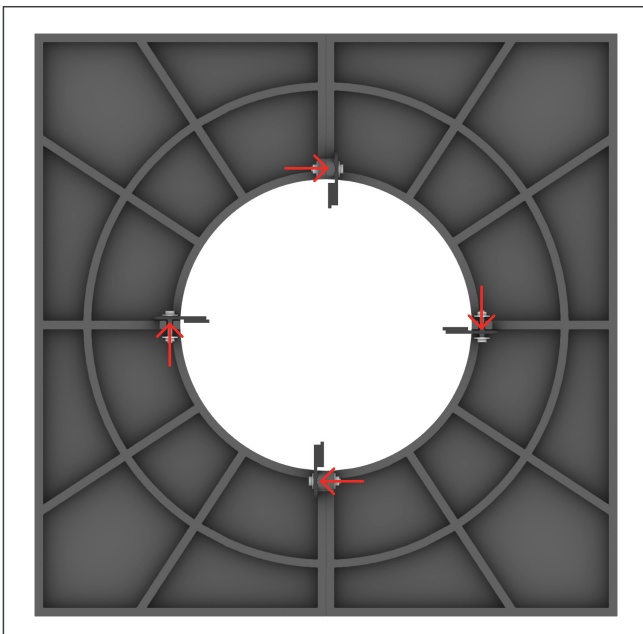

Note!

It's very important all connectors are attached on the same side of the grating "ears" (on the right side from the top view)

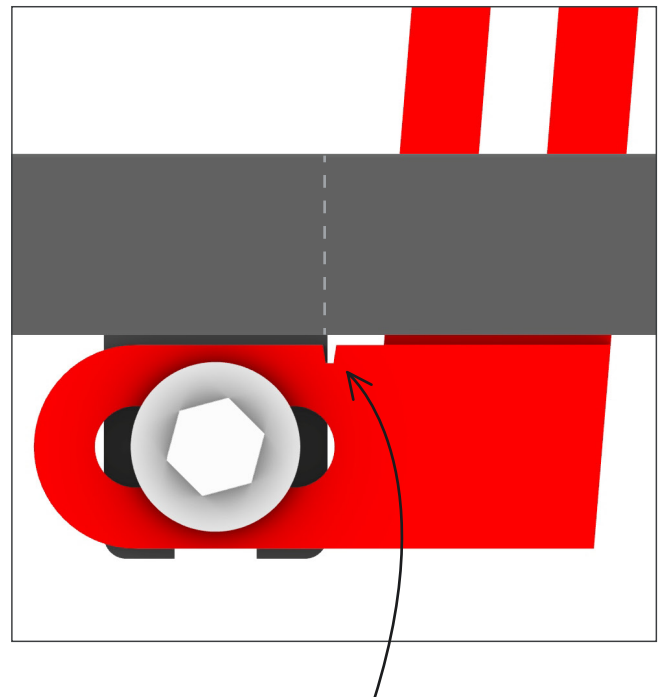

Note!


The notch in the connector (seen above) should align with the inner round rim of the grating.

MALUS
VESE Tree guard
Mounting instructions



02.

Create 2 halves of the tree guard. Attach the legs and the quarter arc pieces as shown.

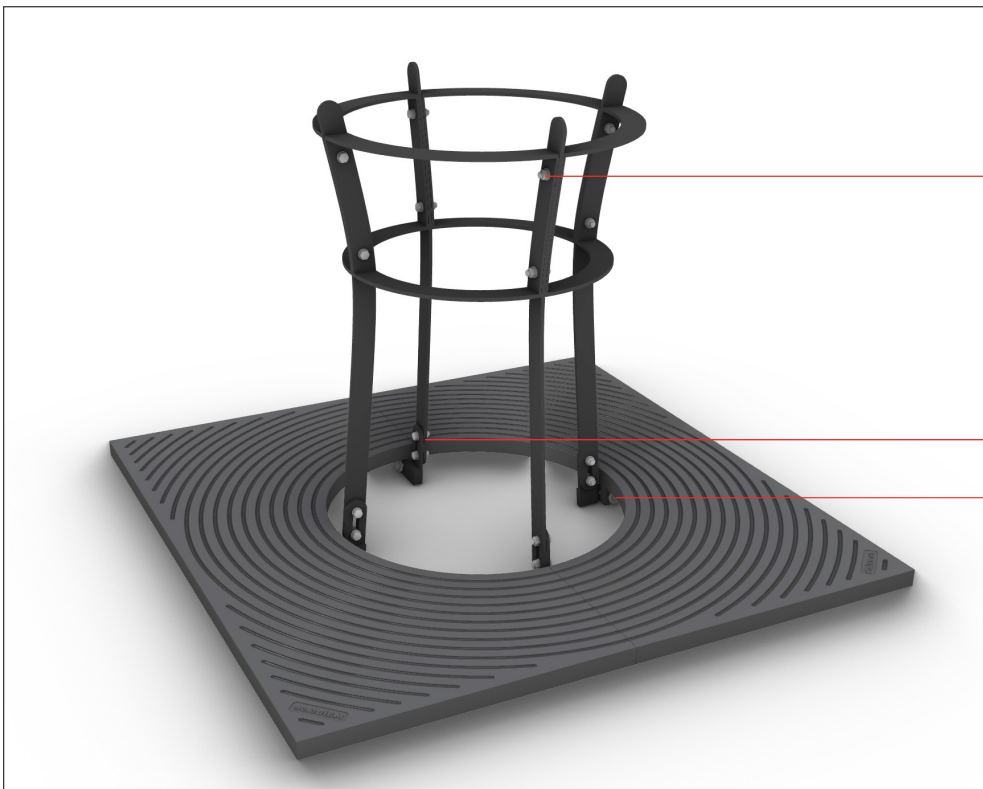

03.

Place the tree guard halves around the tree and connect them to each other with 4 bolts in the top arc area.

Fasten the tree guard structure to the bottom connectors.

Tighten the M12 bolts connecting the tree guard to the grating.